


PRODUCT INFORMATION

Parts & Service



STARTER CFA / CCFA - (Cased) continuous flight auger drilling multi-piece

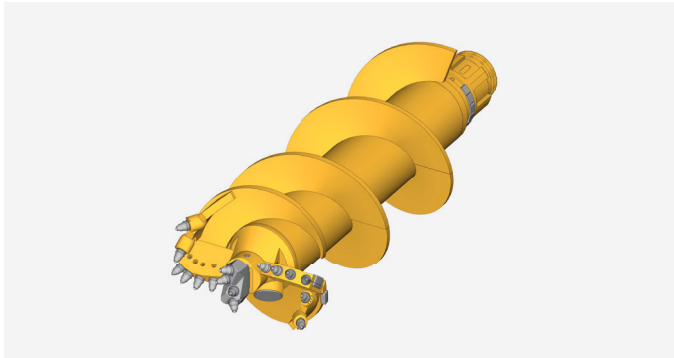

Advantages:

- Designed for top drilling performance
- Particularly long-lasting
- Innovative further development
- Individual application consulting
- Ease of maintenance

Applications:

- Cohesive, friable soils
- No boulders
- CFA: Shear strength $c_u > 15 \text{ kN/m}^2$
- CCFA: Strength UCS $< 20 \text{ MPa}$

Features

Wear protection

- Specifically for highly stressed points
- Easy to replace
- CFA: Wear angles
- CCFA: Hard facing

Cutting geometries

- Starter with flat teeth: AF, AF-2
- Starter with flat teeth and collar plate: AF-K, AF-K2
- Starter with round shank chisel and collar plate: AFF-K, AFF-K2
- For additional cutting geometries, see "Single Pass Equipment" brochure

Material quality

- High material standard
- Use of cast and forged parts depending on requirements

Concreting line

- Diameter 120 mm
- Concrete outlet between the cutting edges

Bauer claw connector

- For maximum torque
- For maximum pulling force

Standard dimensions for CFA and CCFA starter

Ø (mm)	254	368	470
500	x		
550	x		
600	x		
630	x		
750	x	x	
770	x	x	
880		x	x
1,000		x	x
1,180		x	x

Working length = 1,000 / 2,000 mm | Other lengths and diameters on request.

CONTACT:

BAUER Maschinen GmbH

Parts & Service
Product Management Drilling Tools / Kelly Bars
BAUER-Strasse 1
86529 Schrobenhausen, Germany
Phone: +49 8252 97-0
BMA-Parts-and-Service@bauer.de
www.bauer.de

Go to
Dritoc



Go to
catalog



Available
worldwide

