


# PRODUCT INFORMATION

## Parts & Service



### STARTER FDP – Full displacement piling – one-piece or multi-piece

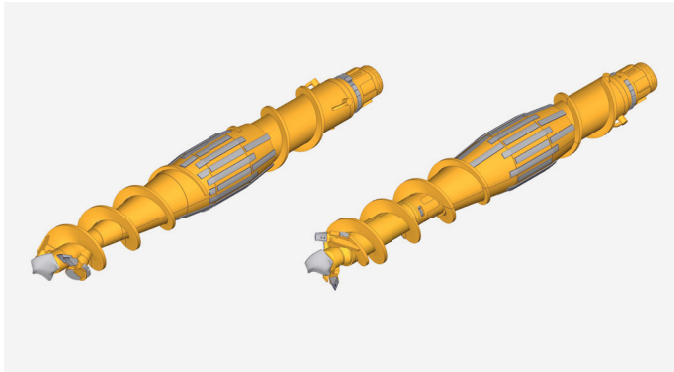

#### Advantages:

- Designed for top drilling performance
- Particularly long-lasting
- Innovative further development
- Individual application consulting
- Ease of maintenance

#### Applications:

- Displaceable soils
- Sandy gravel, sand, silt and clay up to soft organic soils
- Standard Penetration Test  $N_{30} < 30$  or  
Cone Penetration Test  $< 10$  MP
- Undrained shear strength approx.  $> 15$  kN/m<sup>2</sup>

## Features

#### Assembly

- One-piece: Rigid connection between displacement body and cutting geometry
- Multi-piece: Variable connection between displacement body and cutting geometry
- Multi-piece: Optional with feed-auger

#### Cutting geometries

- Double cut starter with flat teeth – AF-2
- Double cut starter with round shank chisel and collar plate – AFF-K2

#### Material quality

- High material standard
- Use of cast and forged parts depending on requirements

#### Concreting pipe

- Diameter 120 mm
- Concrete outlet between the cutting blades

#### Bauer claw connector

- For maximum torque
- For maximum pulling force

## Standard dimensions for FDP starter

Ø (mm)	Connector	Working length (mm)
<b>FDP starter one-piece</b>		
360	254	3,025
410	368	3,400
510	368	3,400
620	368	3,400
<b>FDP starter multi-piece</b>		
360	254	3,025 / 3,400
410	368	3,400
510	368	3,400
620	368	3,400

Other lengths and diameters on request.

## CONTACT:

### BAUER Maschinen GmbH

Parts & Service  
Product Management Drilling Tools / Kelly Bars  
BAUER-Strasse 1  
86529 Schrobenhausen, Germany  
Phone: +49 8252 97-0  
BMA-Parts-and-Service@bauer.de  
www.bauer.de

Go to  
Dritoc



Go to  
catalog



Available  
worldwide

